

Model: P1375D5


Powered by PERKINS

Output Rating

MODEL		Power rating		Voltage available		
		PRIME(1)	STANDBY(2)			
P1375D5	400V/50HZ	1000KW	1100KW	380/220V	400/230V	415/240V
	PF:0.8	1250KVA	1375KVA			

General Information

Model	P1375D5		
Engine	4012-46TWG2A		
Speed control type	Electronic		
Phase	3		
Control System	Digital		
System voltage	12V/24V		
Frequency	50HZ		
Engine Speed(RPM)	1500		
Fuel Consumption L/hr	Standby power(2)	287	
	Prime Power(1)	258	
	75% prime power	196	
	50% prime power	141	

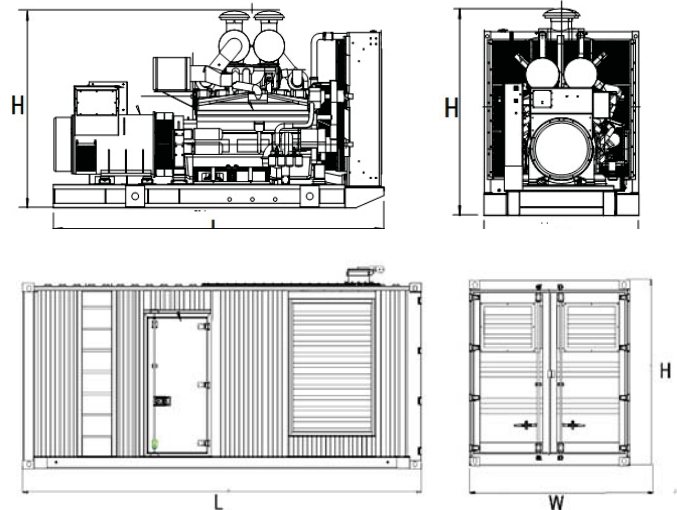

Dimension and Weight

Dimension	Open	Silent
Length (L)	4550mm	12192mm
Width (W)	2010mm	2438mm
Height (H)	2520mm	2896mm
Net Weight	10500KG	NA

AGG POWER gensets are compliant with EC mark which include the following directives

- * 2006/42/EC Machinery safety.
- * 2006/95/EC Low voltage
- * EN 60204-1: 2006+A1:2009, EN ISO 12100:2010, EN ISO 13849-1: 2008, EN 12601: 2010

(1) Prime Power (PRP):

According to ISO 8528-1:2005, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operation conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24h of operation shall not exceed 70% of the PRP.

(2) Standby Power (ESP):

According to ISO 8528-1:2005, standby power is the maximum power available during a variable electrical power sequence, under the stated operation conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24h of operation shall not exceed 70% of the ESP.



Engine Specification

Basic technical data

Number of cylinders ... 12
 Cylinder arrangement ... Vee 60°
 Cycle ... 4 stroke, compression ignition
 Induction system ... turbocharged
 Combustion system ... direct injection
 Compression ratio ... 13:1 nominal
 Bore ... 160 mm
 Stroke ... 190 mm
 Cubic capacity ... 45-842 litres
 Direction of rotation ... Anti clockwise viewed on flywheel
 Firing order ... 1^A, 6^B, 5^A, 2^B, 3^A, 4^B, 6^A, 1^B, 2^A, 5^B, 4^A, 3^B
 Cylinder 1 ... furthest from flywheel

Note: Cylinders designated 'A' are on the right hand side of the engine when viewed from the flywheel end.

Overall dimensions of ElectropaK

Height ... 2255 mm
 Length ... 3714 mm
 Width
 -temperate ... 1780 mm
 -tropical ... 1978 mm

Moment of inertia (mk²)

Flywheel ... 9,57 kgm²
 Engine ... 9,73 kgm²

Lubrication system

Recommended multigrade oil viscosity (15W40) which adequately meets the specifications of API CH4. For further details refer to the engine OMM.

Lubricating oil capacity

Total system ... 177 litres
 Sump maximum ... 159 litres
 Sump minimum ... 136 litres
 Oil temperature at normal operating conditions ... 95 °C
 Oil temperature (in rail) - maximum continuous operation .. 105 °C

Cooling system

Recommended coolant: 50% inhibited ethylene glycol or 50% inhibited propylene glycol and 50% clean fresh water. For CHP systems and where there is no likelihood of ambient temperature below 10 °C, then clean 'soft' water may be used, treated with 1% by volume of Perkins inhibitor in the cooling system. The inhibitor is available in 1 litre bottles from all Perkins Distributors.

Maximum pressure in crankcase water jacket ... 170 kPa
 Maximum top tank temperature (standby) ... 98 °C
 Maximum static pressure on pump ... 70 kPa
 Maximum pressure cap setting ... 70 kPa

Exhaust system

Outlet size (internal) ... 2 x 254 mm
 Outlet flange size ... 10" table D
 Back pressure for total system ... 5 kPa
 For recommended pipe sizes, refer to the Installation Manual.

General installation - 4012-46TWG2A (Temperate) 50 Hz @ 1500 rev/min

Designation	Units	Type of operation and application		
		Base	Prime	Standby
Gross engine power	kWb	884	1106	1217
Fan and battery charging alternator power	kW	51		
Net engine power	kWm	833	1055	1166
Brake mean effective pressure (gross)	kPa	1543	1930	21,24
Combustion air flow at ISO conditions	m ³ /min	90	102	109
Exhaust gas temperature (max) after turbo	°C	422		
Exhaust gas flow (max) at atmospheric pressure	m ³ /min	230		
Boost pressure ratio	-	2,38	2,86	3,09
Mechanical efficiency	%	88.0	90.2	91.0
Overall thermal efficiency (nett)	%	39.46	39.81	39.66
Friction and pumping power losses	kWm	120		
Mean piston speed	m/s	9,5		
Engine coolant flow	l/min	948		
Typical GenSet electrical output (0.8pf)	kVA	989	1253	1385
	kWe	791	1002	1108
Assumed alternator efficiency	%	95		



▪ Alternator

Alternator		
Poles	Num	4
Winding Connections (standard)		Star-serie
Insulation	Class	H class
Enclosure (according IEC-34-5)		IP23
Exciter System		Brushless
Voltage Regulator		A.V.R.
Bearing		Single bearing
Coupling		Flexible disc
Coating type		Standard (Vacuum impregnation)

▪ Options

Engine	Alternator	Generator Sets	Fuel System	Canopy
<ul style="list-style-type: none"> •Water Jacket Preheater •Oil Preheater 	<ul style="list-style-type: none"> •Winding Temperature measuring Instrument •Alternator Preheater •PMG •Anti-damp and anti-corrosion treatment •Anti-condensation heater 	<ul style="list-style-type: none"> •Tools with the machine 	<ul style="list-style-type: none"> • Low fuel level alarm •Automatic fuel feeding system •Fuel T-valves 	<ul style="list-style-type: none"> •Rental Type Canopy •Trailer
Lubricating System	Exhaust System	Cooling System	Control Panel	Voltages
<ul style="list-style-type: none"> •Oil with the machine 	<ul style="list-style-type: none"> •Protection board from hotness 	<ul style="list-style-type: none"> • Front heat protection • Coolant (-30°C) 	<ul style="list-style-type: none"> •Remote control panel • ATS • Remote controller • Synchronizing controller 	<ul style="list-style-type: none"> • 415/240V • 380/220V • 220/127V • 220/127V • 200-115V



Control Panel: AMF20



Benefits

- Less wiring and components
- Integrated solution
- Less engineering and programming
- Perfect price/performance ratio

Features

- Support of engines equipped with Electronic Control Unit (J1939 interface)
- Comprehensive diagnostic messages; SPN/FMI codes; KWP2000 support
- Automatic or manual start/stop of the gen-set
- Push buttons for simple control, lamp test
- Graphic back-lit LCD display 128x64 pixels
- 6 LED indicators
- Parameters adjustable via keyboard or PC
- Generator C.B. and Mains C.B. control with feedback and return timer
- RS232 interface (AT-LINK CONV cable is necessary for IL-AMF 20)
- Modem communication support (IL-AMF 25 only)
- Dimensions 180x120 mm (front panel)
- Sealed to IP65

- Mains measurements (50/60 Hz): U1-U3, Hz
- Generator measurements (50/60 Hz): U1-U3, I1-I3, Hz, kW, kVAr, kWh
- Selectable protections alarm/shutdown
- 3 phase Generator protections
 - Over-/under voltage
 - Over-/under frequency
 - Current/voltage asymmetry
 - Overcurrent/overload
- 3 phase AMF function
 - Over-/under frequency
 - Over-/under voltage
 - Voltage asymmetry
- Configurable analog inputs
- Battery voltage, engine speed (pick-up) measurement
- Configurable programmable binary inputs and outputs
- Warm-up and cooling functions

The Chart of Functions of IntelLite[®] Controllers

FUNCTIONS/CONTROLLERS	IL-AMF 20	IL-AMF 25	IL-MRS 10	IL-MRS 15	IL-MRS 11	IL-MRS 16
Binary inputs/outputs	7 / 7	7 / 7	6 / 6	6 / 6	6 / 6	6 / 6
Analog inputs	3	3	3	3	3	3
Pick-up	•	•	•	•	•	•
AMF function	•	•	-	-	-	-
Input configuration	•	•	•	•	•	•
Output configuration	•	•	•	•	•	•
Voltage measurement Gen./Mains	3ph / 3ph	3ph / 3ph	3ph / -	3ph / -	3ph / -	3ph / -
Current measurement	3ph	3ph, IDMT overcurrent	3ph	3ph, IDMT overcurrent	3ph	3ph, IDMT overcurrent
kW/kWh measurement	• / -	• / •	• / -	• / •	• / -	• / •
GCB/MCB control with feedback	• / •	• / •	- / -	- / -	• / -	• / -
Extension units (periph.)	-	IGL-RA15, IG-IOM, IGS-PTM	-	IGL-RA15, IG-IOM, IGS-PTM	-	IGL-RA15, IG-IOM, IGS-PTM
Communication interfaces	RS232 ²⁾	RS232, CAN ³⁾	RS232 ²⁾	RS232, CAN ³⁾	RS232 ²⁾	RS232, CAN ³⁾
Modem support	-	•	-	•	-	•
Battery charging alternator circuit	•	•	•	•	•	•

Key: • included; - excluded
 1) GCB control, but without feedback
 2) For IL-AMF 20, IL-MRS 10/11
 AT-LINK CONV cable necessary
 3) CAN for periph.

Legend: IG-IOM/IGS-PTM: I/O extension modules
 IGL-RA15: Remote annunciator
 I-RD: Remote display

